

WILLCOX & GIBBS

MS-2516 / MST-2516

Ultra High Speed safety stitch machines
Ultra High Speed top feed safety stitch machines

Sewing

WILLCOX & GIBBS



COMMON SPECIFICATIONS:

Stitch Type:	2-needle safety stitch (515 and 516 stitch)
Max. Sewing Speed:	7500 Stitches/min
Fabric Clearance:	up to 7 mm
Overedge width:	3, 4, 5 & 6 mm (9 mm as special version see separate flyer)
Needle gauge:	3 & 5 mm (11 mm as special version see separate flyer)

ADVANTAGE

- Push button stitch regulator
- Lever and micro adjustable differential feed
- Excellent automatic lubrication
- Easy maintenance
- Low noise level
- Best value (quality-price) in the industry




SPECIFICATIONS:

WILLCOX & GIBBS

Model		 Max. Sewing Speed S.P.M.	 Lifting Of Presser Foot mm	 Max. Stitch Length mm	 Overedging width mm	 Needle Gauge mm	 differential ratio	 Thickness Of The Sewn Products
MS-2516-02/S25-3x5	Plain Seaming	7500	5	3.8	4,⑤	3	0.7~2	Light-Medium
MS-2516-03/S35-5x5	Plain Seaming <standard>	7500	5	3.8	⑤,6	5	0.7~2	Medium-heavy
MS-2516SM-03/S35-5x5/KH2F	With Mini Servo Motor & materials Detector, under Suction Type Thread Trimmer & Venturi Device	7500	5	3.8	⑤,6	5	0.7~2	heavy-extra-heavy
MS-2516-04/L35-5x6	Plain Seaming	6500	7	5	5,⑥	5	0.8~1.5	extra-heavy
MS-2516H-05/H35-5x6	Plain Seaming	6000	7	5	5,⑥	5	0.8~1.5	Medium-heavy
MS-2542-53/S34-5x5	Inserting Tape	7000	5	3.8	⑤	5	0.7~2	Medium
MS-2516-53/S35-3x5	Inserting Tape	7000	5	3.8	4,⑤	3	0.7~2	Medium
MS-2516-42/S35-3x5	shirring	7000	5	3.2	4,⑤	3	0.85~2.8	Medium
MST-2516-03/S35-5x5	Variable Top Feed	7500	5	3.8	⑤,6	5	0.7~2	Medium-heavy
MSA-2516-03/S35-5x5	With Special Coating	7500	5	3.8	⑤,6	5	0.7~2	Medium-heavy

OPTIONS:

- Chain cutter
- Tape cutter
- Automatic foot lift
- Venturi device

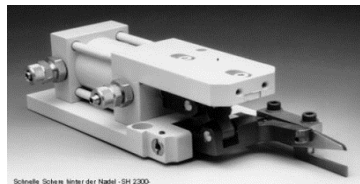

Schnelle Scheren hinter der Nadel - SH 2300



pima

PIMA LLC

PFaff Industrial of America, Inc.
2200 Norcross Parkway, Suite 280A
Norcross, GA 30071

1-770-447-7545

Office@pfaff-industrial.us

www.pfaff-industrial.us