

WILLCOX & GIBBS

MS-2544 / MST-2544

Ultra High Speed **3-needle** safety stitch machines
Ultra High Speed top feed **3-needle** safety stitch machines

Sewing

WILLCOX & GIBBS



COMMON SPECIFICATIONS:

Stitch Type:	3-needle safety stitch (401 plus 514 stitch)
Max. Sewing Speed:	7000 Stitches/min
Fabric Clearance:	up to 7 mm
Overedge width:	4 & 5 mm
Needle gauge:	5 x 2 and 5 x 3 mm

ADVANTAGE



- The most universal safety stitch machine available!!

- Use for 401 stitch, 504 stitch, 514 stitch, 515 stitch and 514+401 stitch
- Push button stitch regulator
- Lever and micro adjustable differential feed
- Excellent automatic lubrication
- Easy maintenance
- Low noise level
- Best value (quality-price) in the industry


SPECIFICATIONS:



Model		 Max. Sewing Speed S.P.M.	 Lifting Of Presser Foot mm	 Max. Stitch Length mm	 Overedge width mm	 Needle Gauge mm	 Differential Ratio	 Thickness Of The Sewn Products
MS-2544-03/M36-5×2×4	Plain Seaming <Medium-heavy>	7000	5.5	3.8	4	5×2	0.7~2	Medium -heavy
MS-2544SM-03/M36-5×2×4	With MiniServo Motor & materials Detector, under Suction Type Thread Trimmer & Venturi Device	7000	5.5	3.8	4	5×2	0.7~2	
MS-2544-04/L36-5×3×5	Plain Seaming <heavy-extra-heavy>	6500	7	5	5	5×3	0.8~1.5	heavy-extra-heavy
MST-2544-03/M36-5×2×4	Variable Top Feed	7000	5.5	3.8	4	5×2	0.7~2	Medium -heavy
MSA-2544-03/M36-5×2×4	With Special Coating	7000	5.5	3.8	4	5×2	0.7~2	

OPTIONS:

- Chain cutter
- Tape cutter
- Automatic foot lift
- Venturi device

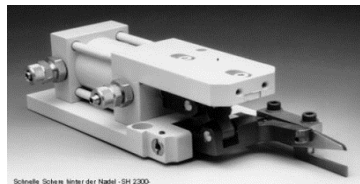

PIMA LLC
 PFAFF Industrial of America, Inc.
 2200 Norcross Parkway, Suite 280A
 Norcross, GA 30071
 1-770-447-7545
Office@pfaff-industrial.us
www.pfaff-industrial.us