



CS-8162S



| | |
|------------------------------------|--|
| Model CS-8162S | S.P.M. 3,500 |
| Max. Stitch Length 5mm | Lift Of Presser Foot (Hand/Knee) 7mm/9mm |
| Needle System DP×5 #11 | |
| Needle Bar Stroke 33.4mm | Thickness Of The Sewn Products Light |

Double Needle, Needle Feed, Flatbed Sewing Machine. (Standard Hook, For Light Materials) (Automatic Lubrication)

Applied with the newly improved main shaft mechanism, ensured further durability .

Some parts of the thread take-up mechanism be plated with special coating, could increase the strength & durability of the machine.

- Needle feed mechanism synchronously moves with lower drop feed, ensures fine and non twisted seams from slippery or difficult to feed materials.
- Fully rotating vertical axis hook with automatic lubricating system .
- Automatic lubricating system with min. oil on the needle bar, smooth and quiet running, easy maintenance .
- Standard needle gauge:1/4"(6.4 mm). Simple and quick gauge change.

CS-81

62

-

BT

Model

Double Needle, Needle Feed,
Flatbed Sewing Machine.












Code Description:

- 62S:** Standard Hook(For Light Material)
62: Standard Hook(For Medium~Heavy Material)
72: Large Hook(For Heavy Material)

Code Description:

- BT:** Automatic Undertrimming
& Automatic Backtacking
& Automatic Wiper &
Operation Box
p: With rear puller
SM: Smocking Mechanism

SPECIFICATIONS:

| Model |  Max. Sewing Speed S.P.M. |  Lifting Of Presser Foot (Hand/knee) mm |  Max. Stitch Length mm |  Needle Bar Stroke mm |  Needle System |  Automatic Undertrimming |  Automatic Backtacking |  Automatic Wiper |  Operation Box |  Thickness Of The Sewn Products |  Hook System |
|-------------|---|--|--|---|---|---|---|--|---|--|---|
| CS-8162S | 3500 | 7/9 | 5 | 33.4 | DP×5 #11 | | | | | Light | Standard Hook |
| CS-8162S-BT | 3500 | 7/9 | 5 | 33.4 | | ● | ● | ● | ● | | |
| CS-8162 | 3500 | 7/9 | 5 | 33.4 | DP×5 #14 (#11~#16) | | | | | Medium-heavy | Standard Hook |
| CS-8162BT | 3500 | 7/9 | 5 | 33.4 | | ● | ● | ● | ● | | |
| CS-8162P | 3500 | 7/9 | 5 | 33.4 | | | | | | | |
| CS-8162SM | 3500 | 7/9 | 5 | 33.4 | | | | | | | |
| CS-8172 | 3000 | 7/13 | 7 | 35 | DP×5 #21 (#19~#22) | | | | | heavy | Large Hook |
| CS-8172BT | 3000 | 7/13 | 7 | 35 | | ● | ● | ● | ● | | |

CS-8162BT



Double Needle, Needle Feed, Flatbed Sewing Machine.(With automatic undertrimming & backtacking & wiper & operation box)(Standard hook, for medium materials-heavy materials)(Automatic Lubrication)

- Applied with the new style of automatic undertrimming mechanism, the undertrimming result is more perfect.
- Applied with the automatic backtacking device: the backtacking only with gentle press on the backtacking switch, easy operation and could increase the sewing quality & efficiency.

CS-8172BT



Double Needle, Needle Feed, Flatbed Sewing Machine.(With automatic undertrimming & backtacking & wiper & operation box)(Large hook, for heavy materials)(Automatic Lubrication)

- Applied with large hook, it could reduce the consumption of thread, and increase the sewing efficiency.
- The other special features are as CS-8162BT.

CS-8162BT



Double Needle, Needle Feed, Flatbed Sewing Machine.(With automatic undertrimming & backtacking & wiper & operation box)(Standard hook, for medium materials~heavy materials)(Automatic lubrication)

- Applied with the new style of automatic undertrimming mechanism, the undertrimming result is more perfect.
- Applied with the automatic backtacking device: the backtacking only with gentle press on the backtacking switch, easy operation and could increase the sewing quality & efficiency.

CS-8172BT



Double Needle, Needle Feed, Flatbed Sewing Machine.(With automatic undertrimming & backtacking & wiper & operation box)(Large hook, for heavy materials)(Automatic lubrication)

- Applied with large hook,It could reduce the consumption of thread, and increase the sewing efficiency.
- The other special features are as CS-8162BT.



CS-8165


Double needle, split needle bar, needle feed, flatbed sewing machine.(Standard hook, For medium materials ~heavy materials)(Automatic Lubrication)

| | |
|--|---|
| Model No. CS-8165 | S.P.M. 2,500 |
| Max.Stitch Length 5mm | Lift Of Presser Foot (Hand/Knee) 7/9mm |
| Needle System DP×5 #14 (#11~#16) | Needle Bar Stroke 33.4mm |
| Thickness Of The Sewn Products Medium~Heavy | |







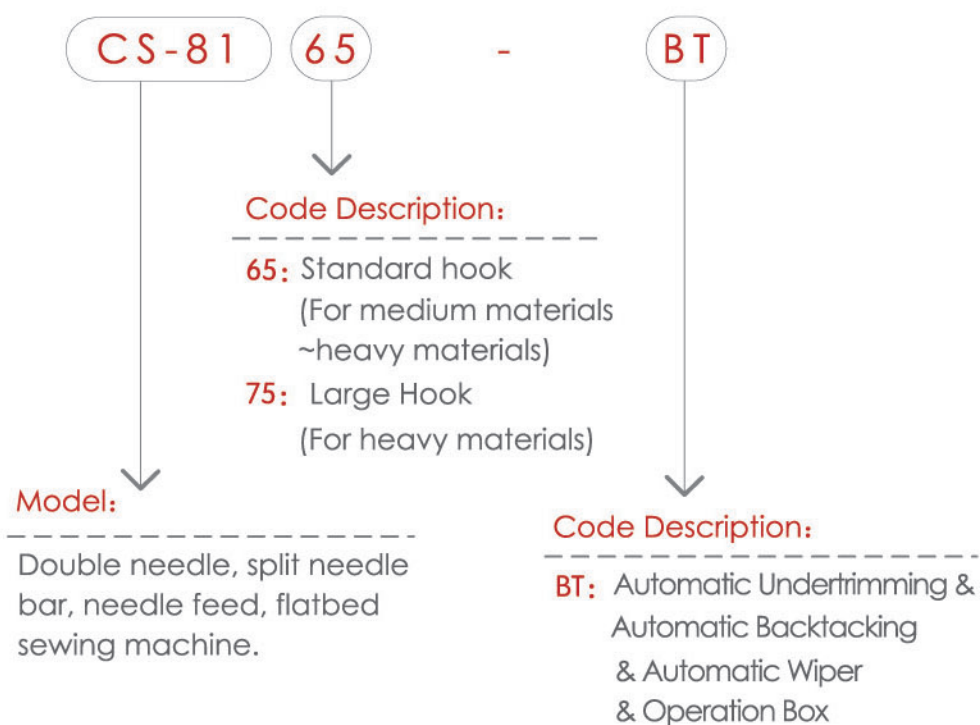



Applied with the newly improved main shaft mechanism, ensured further durability. Some parts of the thread take-up & needle bar mechanism be plated with special coating,could increase the strength & durability of the machine.

SPLIT NEEDLE BAR.....This machine is equipped with disengageable needle bars which allow single needle sewing at a corner with one-touch-lever operation.

- Needle feed mechanism synchronously moves with lower drop feed, ensures fine and non twisted seams from slippery or difficult to feed materials.
- Standard needle gauge:1/4"(6.4 mm). Simple and quick gauge change.
- Automatic lubricating system, (Min.oil on the needle bar) smooth and quiet running, easy maintenance.
- Applied for medium light~materials of 2-needle corner stitching.



SPECIFICATIONS:

| Model No. |  Max. Sewing Speed S. P. M. |  Lifting Of Presser Foot (Hand/Knee) |  Max. Stitch Length |  Needle Bar Stroke |  Needle System |  Sewn Materials Hook System |  Operation Box |  Automatic Undertrimming |  Automatic Backtacking |  Automatic Wiper |
|-----------|--|--|---|--|--|--|--|--|--|--|
| CS-8165 | 2500 | 7/9 | 5 | 33.4 | DP×5 #14 (#11~#16) | Medium ~Heavy Standard hook | | | | |
| CS-8165BT | 2500 | 7/9 | 5 | 33.4 | DP×5 #14 (#11~#16) | Standard hook | ○ | ○ | ○ | ○ |
| CS-8175 | 2500 | 7/13 | 7 | 35 | DP×5 #21 (#19~#22) | Heavy Large hook | | | | |
| CS-8175BT | 2500 | 7/13 | 7 | 35 | DP×5 #21 (#19~#22) | Large hook | ○ | ○ | ○ | ○ |

CS-8165BT



Double needle, split needle bar, needle feed, flatbed sewing machine. (With automatic undertrimming & backtacking & wiper & operation box) (Standard hook, for medium materials~heavy materials) (Automatic lubrication)

- Applied with the new style of automatic undertrimming mechanism, the undertrimming result is more perfect.
- Applied with the automatic backtacking device: the backtacking only with gentle press on the backtacking switch, easy operation.

CS-8175BT



Double needle, split needle bar, needle feed, flatbed sewing machine. (With automatic undertrimming & backtacking & wiper & operation box) (Large hook, for heavy materials) (Automatic lubrication)

- Applied with large hook, it could reduce the consumption of thread, and increase the sewing efficiency.
- The other special features are as CS-8165BT.



CS-8176D-BT

Direct Drive, Double Needle, Split Needle Bar, Needle Feed, Flatbed Sewing Machine. (Large hook, For heavy materials) (Minimum lubrication) (With automatic undertrimming & backtacking & Operation Box & Wiper & Direct drive servo motor)

| | | | |
|---|--|-----------------|--|
| Model No. CS-8176D-BT | | S.P.M. 3,000 | |
| Max. Stitch Length 7mm | Lift Of Presser Foot (Hand/Knee) 7/10mm | | |
| Needle System DP×5 #18 (#15~#20) | Needle Bar Stroke 33.4mm | | |
| Thickness Of The Sewn Products Heavy | | | |

The new design of machine with direct drive servo motor & minimum oil lubrication system.

Applied with the newly improved main shaft mechanism, ensured further durability. Some parts of the thread take-up & needle bar mechanism be plated with special material, could increase the strength & durability of the machine.

SPLIT NEEDLE BAR.....This machine is equipped with disengageable needle bars which allow single needle sewing at a corner with one-touch-lever operation.

- Needle feed mechanism synchronously moves with lower drop feed, ensures fine and non twisted seams from slippery or difficult to feed materials.
- Applied for heavy materials of 2-needle corner stitching.
- Standard needle gauge: 1/4" (6.4mm).