




CS-8162S



Model CS-8162S	S.P.M. 3,500
Max. Stitch Length 5mm	Lift Of Presser Foot (Hand/Knee) 7mm/9mm
Needle System DP×5 #11	
Needle Bar Stroke 33.4mm	Thickness Of The Sewn Products Light

Double Needle, Needle Feed, Flatbed Sewing Machine. (Standard Hook, For Light Materials) (Automatic Lubrication)

Applied with the newly improved main shaft mechanism, ensured further durability .

Some parts of the thread take-up mechanism be plated with special coating, could increase the strength & durability of the machine.

- Needle feed mechanism synchronously moves with lower drop feed, ensures fine and non twisted seams from slippery or difficult to feed materials.
- Fully rotating vertical axis hook with automatic lubricating system .
- Automatic lubricating system with min. oil on the needle bar, smooth and quiet running, easy maintenance .
- Standard needle gauge:1/4"(6.4 mm). Simple and quick gauge change.

CS-81

62

-

BT

Model

Double Needle, Needle Feed,
Flatbed Sewing Machine.












Code Description:

- 62S:** Standard Hook(For Light Material)
62: Standard Hook(For Medium~Heavy Material)
72: Large Hook(For Heavy Material)

Code Description:

- BT:** Automatic Undertrimming
& Automatic Backtacking
& Automatic Wiper &
Operation Box
p: With rear puller
SM: Smocking Mechanism

SPECIFICATIONS:

Model	 Max. Sewing Speed S.P.M.	 Lifting Of Presser Foot (Hand/knee) mm	 Max. Stitch Length mm	 Needle Bar Stroke mm	 Needle System	 Automatic Undertrimming	 Automatic Backtacking	 Automatic Wiper	 Operation Box	 Thickness Of The Sewn Products	 Hook System
CS-8162S	3500	7/9	5	33.4	DP×5 #11					Light	Standard Hook
CS-8162S-BT	3500	7/9	5	33.4		●	●	●	●		
CS-8162	3500	7/9	5	33.4	DP×5 #14 (#11~#16)					Medium-heavy	Standard Hook
CS-8162BT	3500	7/9	5	33.4		●	●	●	●		
CS-8162P	3500	7/9	5	33.4							
CS-8162SM	3500	7/9	5	33.4							
CS-8172	3000	7/13	7	35	DP×5 #21 (#19~#22)					heavy	Large Hook
CS-8172BT	3000	7/13	7	35		●	●	●	●		

CS-8162BT



Double Needle, Needle Feed, Flatbed Sewing Machine.(With automatic undertrimming & backtacking & wiper & operation box)(Standard hook, for medium materials-heavy materials)(Automatic Lubrication)

- Applied with the new style of automatic undertrimming mechanism, the undertrimming result is more perfect.
- Applied with the automatic backtacking device: the backtacking only with gentle press on the backtacking switch, easy operation and could increase the sewing quality & efficiency.

CS-8172BT



Double Needle, Needle Feed, Flatbed Sewing Machine.(With automatic undertrimming & backtacking & wiper & operation box)(Large hook, for heavy materials)(Automatic Lubrication)

- Applied with large hook, it could reduce the consumption of thread, and increase the sewing efficiency.
- The other special features are as CS-8162BT.

CS-8162BT



Double Needle, Needle Feed, Flatbed Sewing Machine.(With automatic undertrimming & backtacking & wiper & operation box)(Standard hook, for medium materials~heavy materials)(Automatic lubrication)

- Applied with the new style of automatic undertrimming mechanism, the undertrimming result is more perfect.
- Applied with the automatic backtacking device: the backtacking only with gentle press on the backtacking switch, easy operation and could increase the sewing quality & efficiency.

CS-8172BT



Double Needle, Needle Feed, Flatbed Sewing Machine.(With automatic undertrimming & backtacking & wiper & operation box)(Large hook, for heavy materials)(Automatic lubrication)

- Applied with large hook,It could reduce the consumption of thread, and increase the sewing efficiency.
- The other special features are as CS-8162BT.



CS-8165


Double needle, split needle bar, needle feed, flatbed sewing machine.(Standard hook, For medium materials ~heavy materials)(Automatic Lubrication)

Model No. CS-8165	S.P.M. 2,500
Max.Stitch Length 5mm	Lift Of Presser Foot (Hand/Knee) 7/9mm
Needle System DP×5 #14 (#11~#16)	Needle Bar Stroke 33.4mm
Thickness Of The Sewn Products Medium~Heavy	







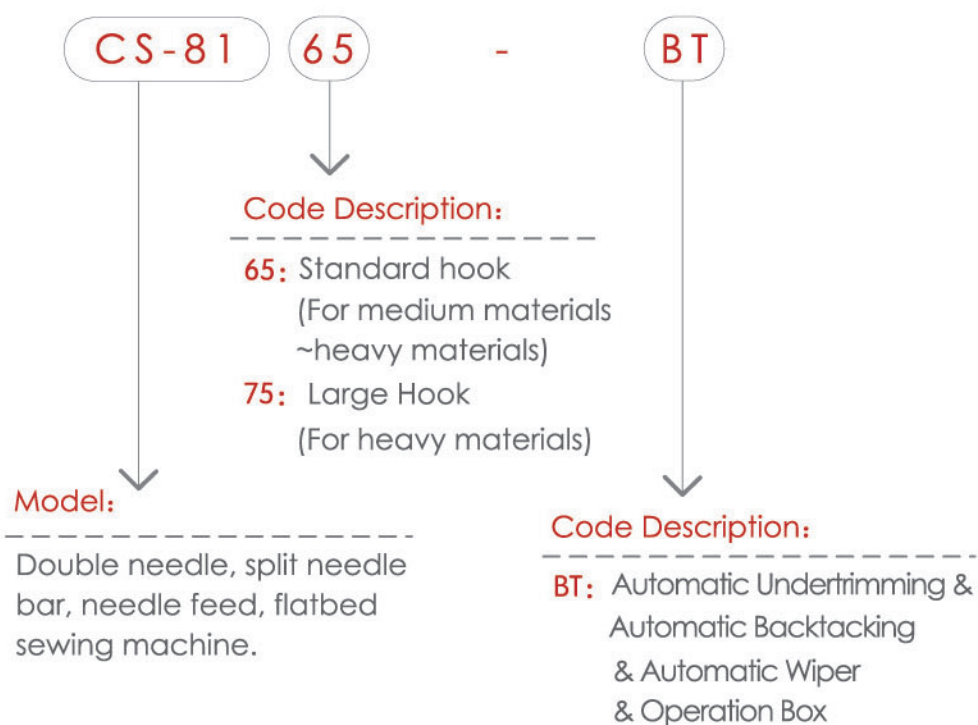

Applied with the newly improved main shaft mechanism, ensured further durability. Some parts of the thread take-up & needle bar mechanism be plated with special coating,could increase the strength & durability of the machine.

SPLIT NEEDLE BAR.....This machine is equipped with disengageable needle bars which allow single needle sewing at a corner with one-touch-lever operation.

- Needle feed mechanism synchronously moves with lower drop feed, ensures fine and non twisted seams from slippery or difficult to feed materials.
- Standard needle gauge:1/4"(6.4 mm). Simple and quick gauge change.
- Automatic lubricating system, (Min.oil on the needle bar) smooth and quiet running, easy maintenance.
- Applied for medium light~materials of 2-needle corner stitching.



SPECIFICATIONS:

SPECIFICATIONS:										
Model No.	 Max. Sewing Speed S. P. M.	 Lifting Of Presser Foot (Hand/Knee)	 Max. Stitch Length	 Needle Bar Stroke	 Needle System	Sewn Materials Hook System	Operation Box	 Automatic Undertrimming	 Automatic Backtacking	 Automatic Wiper
CS-8165	2500	7/9	5	33.4	DP×5 #14 (#11~#16)	Medium ~Heavy Standard hook				
CS-8165BT	2500	7/9	5	33.4	DP×5 #14 (#11~#16)	Standard hook	○	○	○	○
CS-8175	2500	7/13	7	35	DP×5 #21 (#19~#22)	Heavy Large hook				
CS-8175BT	2500	7/13	7	35	DP×5 #21 (#19~#22)	Large hook	○	○	○	○

CS-8165BT



Double needle, split needle bar, needle feed, flatbed sewing machine. (With automatic undertrimming & backtacking & wiper & operation box) (Standard hook, for medium materials~heavy materials) (Automatic lubrication)

- Applied with the new style of automatic undertrimming mechanism, the undertrimming result is more perfect.
- Applied with the automatic backtacking device: the backtacking only with gentle press on the backtacking switch, easy operation.

CS-8175BT



Double needle, split needle bar, needle feed, flatbed sewing machine. (With automatic undertrimming & backtacking & wiper & operation box) (Large hook, for heavy materials) (Automatic lubrication)

- Applied with large hook, it could reduce the consumption of thread, and increase the sewing efficiency.
- The other special features are as CS-8165BT.



CS-8176D-BT

Direct Drive, Double Needle, Split Needle Bar, Needle Feed, Flatbed Sewing Machine. (Large hook, For heavy materials) (Minimum lubrication) (With automatic undertrimming & backtacking & Operation Box & Wiper & Direct drive servo motor)

Model No. CS-8176D-BT		S.P.M. 3,000	
Max. Stitch Length 7mm	Lift Of Presser Foot (Hand/Knee) 7/10mm		
Needle System DP×5 #18 (#15~#20)	Needle Bar Stroke 33.4mm		
Thickness Of The Sewn Products Heavy			

The new design of machine with direct drive servo motor & minimum oil lubrication system.

Applied with the newly improved main shaft mechanism, ensured further durability. Some parts of the thread take-up & needle bar mechanism be plated with special material, could increase the strength & durability of the machine.

SPLIT NEEDLE BAR.....This machine is equipped with disengageable needle bars which allow single needle sewing at a corner with one-touch-lever operation.

- Needle feed mechanism synchronously moves with lower drop feed, ensures fine and non twisted seams from slippery or difficult to feed materials.
- Applied for heavy materials of 2-needle corner stitching.
- Standard needle gauge: 1/4" (6.4mm).