



CS-2604-02 / S33-4




Model CS-2604-02/S33-4		
S.P.M. 8,500	Foot Lift 5mm	Differential Ratio 0.7~2
Stitch Length(Max.) 3.8mm	Overedging Width 4mm	
Thickness Of The Sewn Products Light ~ Medium	Needle 1	Thread 3
Needle System DCx27 (#9~#14)		

1-Needle, 3-Thread, Super High Speed, Overlock Machine. (Light ~medium, Plain seaming) (Standard Type).







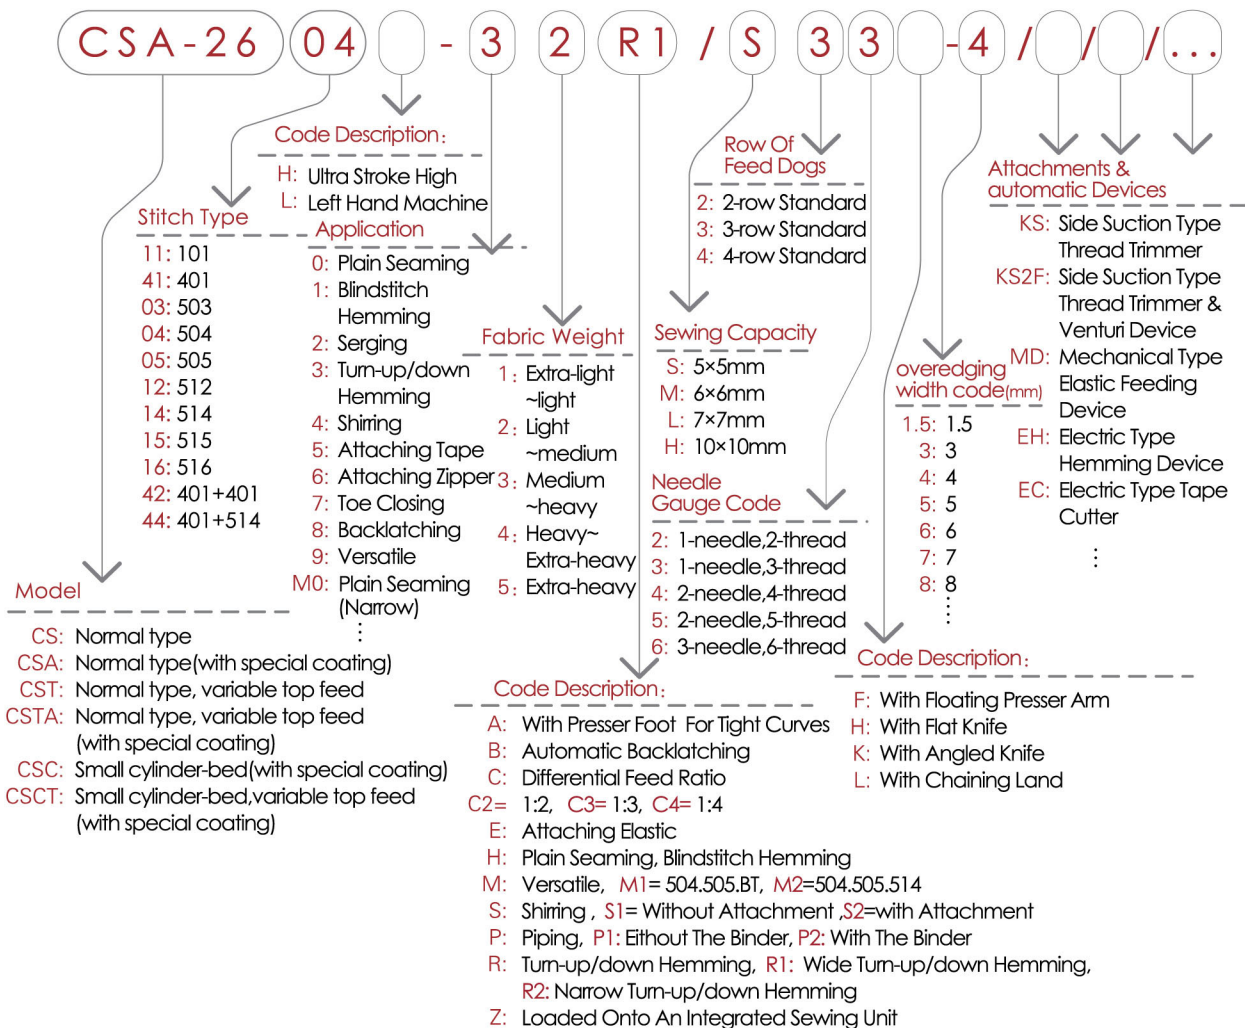

Applied with many improved & perfect new mechanisms, could:

1. Suitable for stitching light~medium fabrics (from extra light to extra heavy), and the seams are extremely beautiful.
2. The cleaning & maintenance & operation, are much easier than before.
3. Suitable for operating in super high speed, could be reduced noise & vibration, and increased the strength & durability.

- Excellent automatic lubricating and filtering (interchangeable) system, ensures the max. sewing speed is up to 8,500 s.p.m..
 - Micro-adjustable and lever-adjustable differential feeding ratio.
 - Push-button type of stitch length regulator, easy operation.
- (①KS: Side suction type thread trimmer ②2F: Venturi device. ③..... Are available.)



SPECIFICATIONS:

Model		 Max. Sewing Speed S.P.M.	 Lifting Of Presser Foot mm	 Max. Stitch Length mm	 Overedging width mm	 differential ratio	 needle	 thread	 Thickness Of The Sewn Products
CS-2604-01/S23-4	Plain Seaming	8500	5	3.8	3,4	0.7~2	1	3	Extra-light~light
CS-2604-02/S33-4	Plain Seaming <standard type>	8500	5	3.8	3,4	0.7~2	1	3	Light~Medium
CS-2604-32R2/S23-1.5	Turn-down Hemming	7000	5.5	3.2	1.5	0.7~2	1	3	Light~Medium
CS-2604-02/S33-4/TR	Plain Seaming (Bath Cap Sewing)	7500	5.5	3.8	3,4,5	0.7~2	1	3	Medium~heavy
CS-2604-82/S23-4	Backlatching	8500	5	3.8	3,4	0.7~2	1	3	Light~Medium
CS-2603-12/S22-4	Blindstitch Hemming (2thread)	8500	5.5	3.8	3,4	0.7~2	1	2	Light~Medium
CS-2605-12/S23-4	Blindstitch Hemming (3thread)	8500	5.5	3.8	3,4	0.7~2	1	3	Light~Medium
CS-2604-32R1/S23-3	Turn-down Hemming	8500	5	3.2	3	0.7~2	1	3	Light~Medium
CS-2604-92M1/S23-4	Versatile	8500	5	3.8	3,4	0.7~2	1	3	Light~Medium
CS-2603-90/L42-8	Versatile	6500	7	3.8	5,6,8	0.7~2	1	2	heavy~extra-heavy
CS-2604-64/L43-8	Attaching Zipper	6500	7	3.8	5,6,8	0.7~2	1	3	heavy~extra-heavy
CST-2604-02/S33-4	Variable Top Feed	8500	5	3.8	3,4	0.7~2	1	3	medium~heavy
CSC-2604-02/S33-4	Small Cylinder-bed	8500	5	3.8	3,4	0.7~2	1	3	Light~Medium
CSCT-2604-02/S33-4	Small Cylinder-bed, Variable Top Feed	8500	5	3.8	3,4	0.7~2	1	3	medium~heavy
CSA-2604-02/S33-4	With Special Coating	8500	5	3.8	3,4	0.7~2	1	3	Light~Medium


CST-2604-02/S33-4



1-needle, 3-thread, Super High Speed, Variable Top Feed, Overlock Machine. (medium~heavy, plain seaming).

- Applied with the independently driven top feed mechanism, could dramatically increase the feeding efficiency & assure the high quality sewing results. These machines are very suitable for stitching the slippery materials & the cord-insertion & the cross seam sections of heavy weight materials.



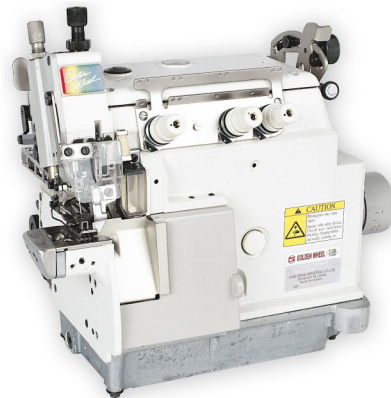




CSCT-2604-02/S33-4




1-needle, 3-thread, Super High Speed, Variable Top Feed, Small cylinder-bed, Overlock Machine. (medium~heavy, plain seaming)

- Applied with the independently driven top feed mechanism, could dramatically increase the feeding efficiency & assure the high quality sewing results. These machines are very suitable for stitching the slippery materials & the cord-insertion & the cross seam sections of heavy weight materials.
- Small cylinder-bed, suitable for stitching the tubular articles.

SPECIFICATIONS:

Model								
		Max. Sewing Speed S.P.M.	Lifting Of Presser Foot mm	Max. Stitch Length mm	Overedging width mm	Needle Gauge mm	differential ratio	Thickness Of The Sewn Products
CS-2614-01/S34-2×4	Plain Seaming	8000	5	3.8	3,④,5	2	0.7~2	Extra-light~light
CS-2614-M03/M34-2×4	Plain Seaming <standard>	7500	5.5	3.8	3,④,5	2	0.7~2	Medium-heavy
CS-2614SM-M03/M34-2×4/KS2F	with mini servomini motor & materials detector, side Suction Type Thread Trimmer & Venturi Device	7500	5.5	3.8	3,④,5	2	0.7~2	Medium-heavy
CS-2614-M53/M34-2×4	attaching tape	7500	5.5	3.2	3,④,5	2	0.7~2.4	Medium-heavy
CS-2614-54/L44-2×4	attaching tape	6500	7	2.4	④,5,6	2	1.1~3.8	heavy-extra-heavy
CS-2614H-55/H44-3×5	attaching tape	5500	7	3.2	⑤,6	3	1.1~3.8	extra-heavy
CS-2614-83/M34-2×4	Backlatching	7500	5.5	3.8	3,④,5	2	0.7~2	Medium-heavy
CS-2614-24/L44-2×4	serging	6500	7	5	④,5,6	2	0.8~1.5	heavy-extra-heavy
CS-2614-43/M34-2×4	shirring	7000	5.5	3.2	3,④,5	2	0.85~2.8	Medium-heavy
CS-2612-02/M34-2×4	plain seaming	7500	5.5	3.8	3,④,5	2	0.7~2	Medium-heavy
CST-2614-M03/M34-2×4	Variable Top Feed	7500	5.5	3.8	3,④	2	0.7~2	Medium-heavy
CST-2614-M03C3P2/M34-2×4	piping seaming	7500	5.5	2.7	3,④,5	2	0.85~2.8	Medium-heavy
CSC-2614-M03/M34-2×4	Small Cylinder-bed	7500	5.5	3.8	3,④,5	2	0.7~2	Medium-heavy
CSCT-2614-M03/M34-2×4	Small Cylinder-bed, Variable Top Feed	7500	5.5	3.8	3,④,5	2	0.7~2	Medium-heavy
CSA-2614-M03/M34-2×4	With Special Coating	7500	5.5	3.8	3,④,5	2	0.7~2	Medium-heavy


CST-2614-M03/M34-2 × 4

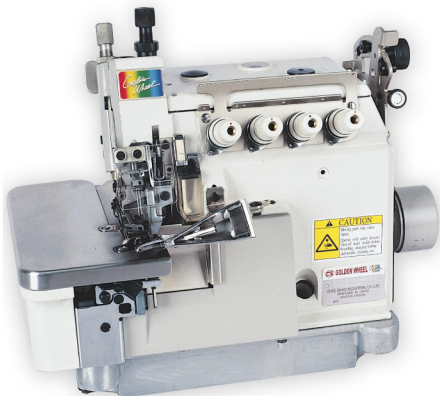

2-needle, 4-thread, Super High Speed, Variable Top Feed, Overlock Machine. (medium-heavy, plain seaming).


- Applied with the independently driven top feed mechanism, could dramatically increase the feeding efficiency & assure the high quality sewing results. These machines are very suitable for stitching the slippery materials & the cord-insertion & the cross seam sections of heavy weight materials.

CSCT-2614-M03/M34-2 × 4

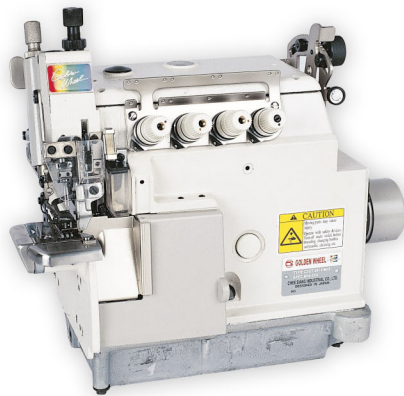


2-needle, 4-thread, Super High Speed, Variable Top Feed, Small cylinder-bed, Overlock Machine. (medium-heavy, plain seaming).

- Applied with the independently driven top feed mechanism, could dramatically increase the feeding efficiency & assure the high quality sewing results. These machines are very suitable for stitching the slippery materials & the cord-insertion & the cross seam sections of heavy weight materials.
- Small cylinder-bed, suitable for stitching the tubular articles.

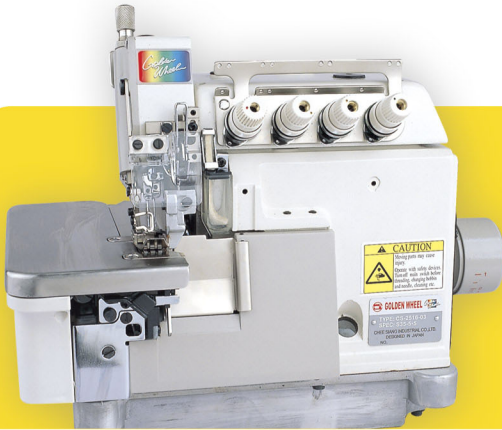

CS-2516-03/S35-5x5




Model CS-2516-03/S35-5x5		
S.P.M.	Foot Lift	Differential Ratio
7,500	5mm	0.7~2
Stitch Length(Max.)	Overedging Width	
3.8mm	5mm	
Needle gauge	Needle	Thread
5mm	2	5
Needle System		
DCx27 (#9~#14)#11		

2-Needle, 5-Thread, Super High Speed, Safety Stitch, Overlock Machine (medium-heavy, Plain seaming) (Standard Type).





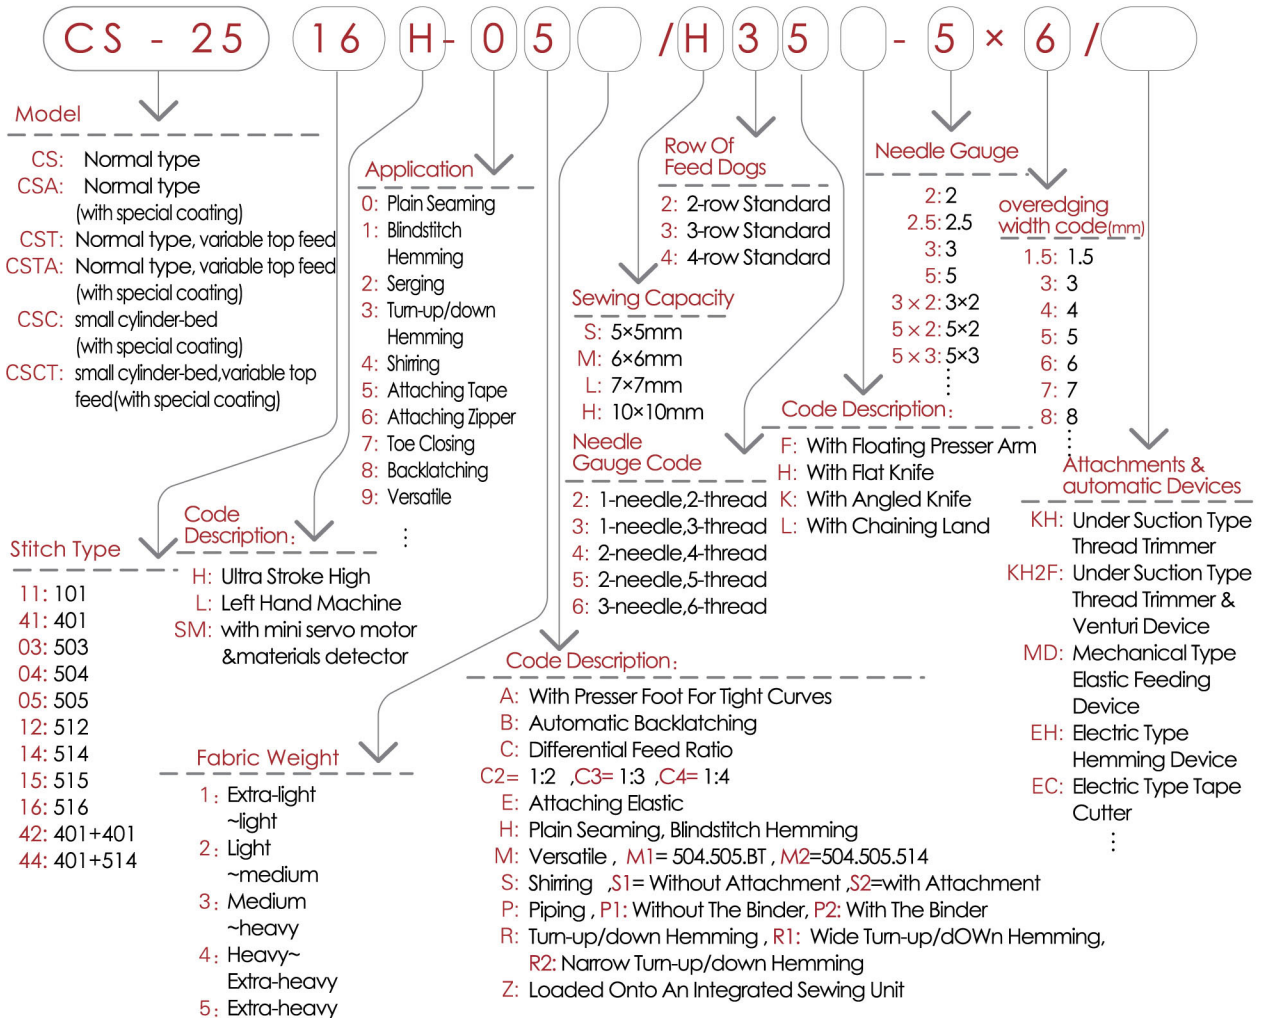


Applied with many improved & perfect new mechanisms, could:

1. Suitable for stitching light~medium fabrics (from extra light to extra heavy), and the seams are extremely beautiful.
2. The cleaning & maintenance & operation, are much easier than before.
3. Suitable for operating in super high speed, could be reduced noise & vibration, and increased the strength & durability.

- Excellent automatic lubricating and filtering (interchangeable) system, ensures the max. sewing speed is up to 7,500 s.p.m..
 - Micro-adjustable and lever-adjustable differential feeding ratio.
 - Push-button type of stitch length regulator, easy operation.
- (①KH: Under suction type thread trimmer ②2F: Venturi device. ③.....Are available.)



SPECIFICATIONS:

Model								
		Max. Sewing Speed S.P.M.	Lifting Of Presser Foot mm	Max. Stitch Length mm	Overedging width mm	Needle Gauge mm	differential ratio	Thickness Of The Sewn Products
CS-2516-02/S25-3×5	Plain Seaming	7500	5	3.8	4,⑤	3	0.7~2	Light-Medium
CS-2516-03/S35-5×5	Plain Seaming <standard>	7500	5	3.8	⑤,6	5	0.7~2	Medium-heavy
CS-2516SM-03/S35-5×5/KH2F	With Mini Servo Motor & materials Detector, under Suction Type Thread Trimmer & Venturi Device	7500	5	3.8	⑤,6	5	0.7~2	Medium-heavy
CS-2516-04/L35-5×6	Plain Seaming	6500	7	5	5,⑥	5	0.8~1.5	heavy-extra-heavy
CS-2516H-05/H35-5×6	Plain Seaming	6000	7	5	5,⑥	5	0.8~1.5	extra-heavy
CS-2542-53/S34-5×5	Inserting Tape	7000	5	3.8	⑤	5	0.7~2	Medium-heavy
CS-2516-53/S35-3×5	Inserting Tape	7000	5	3.8	4,⑤	3	0.7~2	Medium-heavy
CS-2516-42/S35-3×5	shirring	7000	5	3.2	4,⑤	3	0.85~2.8	Medium
CST-2516-03/S35-5×5	Variable Top Feed	7500	5	3.8	⑤,6	5	0.7~2	Medium-heavy
CSA-2516-03/S35-5×5	With Special Coating	7500	5	3.8	⑤,6	5	0.7~2	Medium-heavy

CS-2516H-05/H35-5×6




2-needle, 5-thread, Super High Speed, Safety Stitch, Overlock Machine. (plain seaming) (Extra-Heavy)

CS-2516SM-03/S35-5×5/KH2F



2-needle, 5-thread, Super High Speed, Safety Stitch, Overlock Machine (medium-heavy, plain seaming) (With mini servo motor & materials detector & Under Suction Type Thread Trimmer & Venturi Device) (materials detector)

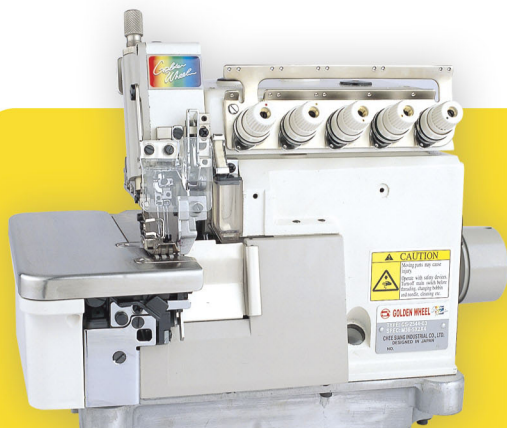

CS-2544-03/M36-5x2x4




Model CS-2544-03/M36-5x2x4		
S.P.M. 7,000	Foot Lift 5.5mm	Differential Ratio 0.7~2
Stitch Length(Max.) 3.8mm	Overredging Width 4mm	
Needle gauge 5x2mm	Needle 3	Thread 6
Needle System DCx27 (#9~#14)#11		

3-Needle, 6-Thread Super High Speed, Safety Stitch, Overlock Machine (medium-heavy, Plain seaming)

Applied with many improved & perfect new mechanisms, could:
 1. Suitable for stitching light-medium fabrics (from extra light to extra heavy), and the seams are extremely beautiful.
 2. The cleaning & maintenance & operation, are much easier than before.
 3. Suitable for operating in super high speed, could be reduced noise & vibration, and increased the strength & durability.

- Excellent automatic lubricating and filtering (interchangeable) system, ensures the max. sewing speed is up to 7,000 s.p.m..
 - Micro-adjustable and lever-adjustable differential feeding ratio.
 - Push-button type of stitch length regulator, easy operation.
- (①KH: Under suction type thread trimmer ②2F: Venturi device. ③.....Are available.)

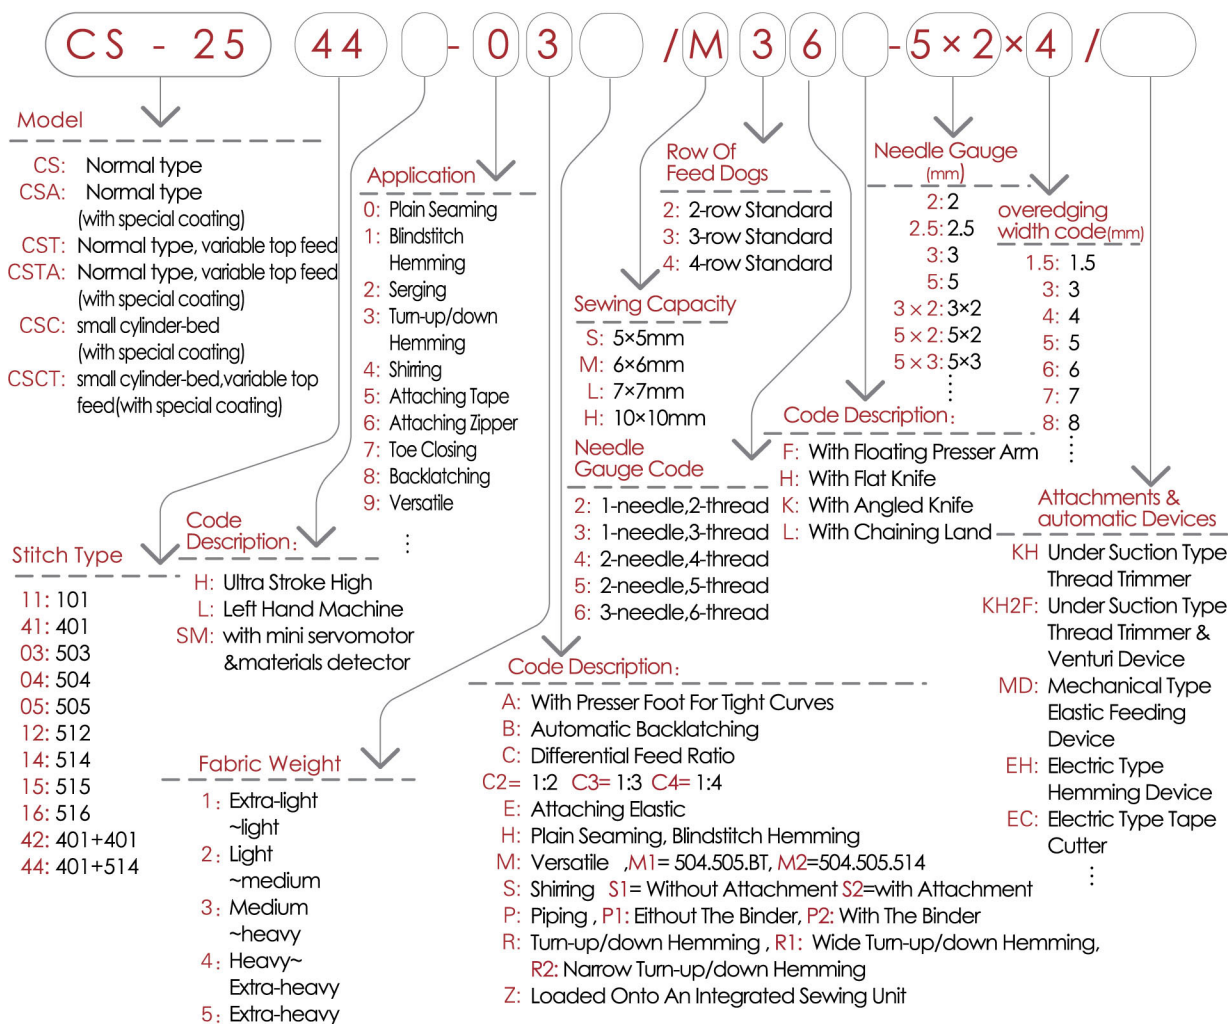

SPECIFICATIONS:


Model								
		Max. Sewing Speed S.P.M.	Lifting Of Presser Foot mm	Max. Stitch Length mm	Overedging width mm	Needle Gauge mm	Differential Ratio	Thickness Of The Sewn Products
CS-2544-03/M36-5×2×4	Plain Seaming <Medium~heavy>	7000	5.5	3.8	4	5×2	0.7~2	Medium~heavy
CS-2544SM-03/M36-5×2×4	With MiniServo Motor &materials Detector, under Suction Type Thread Trimmer & Venturi Device	7000	5.5	3.8	4	5×2	0.7~2	Medium~heavy
CS-2544-04/L36-5×3×5	Plain Seaming <heavy~extra-heavy>	6500	7	5	5	5×3	0.8~1.5	heavy~extra-heavy
CST-2544-03/M36-5×2×4	Variable Top Feed	7000	5.5	3.8	4	5×2	0.7~2	Medium~heavy
CSA-2544-03/M36-5×2×4	With Special Coating	7000	5.5	3.8	4	5×2	0.7~2	Medium~heavy

CS-2544-04/L36-5 × 3 × 5



3-needle, 6-thread, Super High Speed, Safety Stitch, Overlock Machine (Plain Seaming) (For Heavy~extra-heavy)

CST-2544-03/M36-5 × 2 × 4

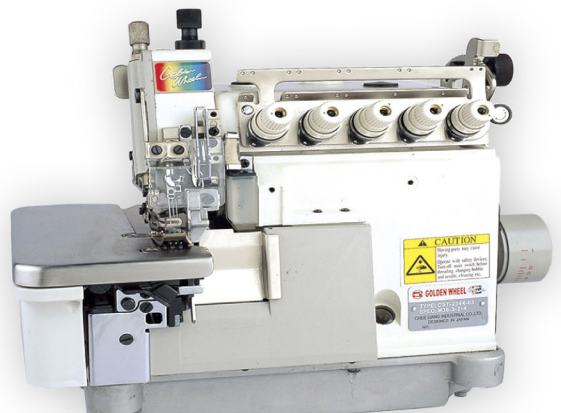

3-needle, 6-thread, Super High Speed, Variable Top Feed, Safety Stitch, Overlock Machine. (medium~heavy, plain seaming).