

Excellence in seaming


Neu:
Short parts stacker for
children's jackets and vests

3519

Automatic sewing machine for
sewing one- and two-pointed
as well as tapered jacket breast darts


PFAFF 3519

Since many years PFAFF has been setting trends worldwide with leading manufacturers for men's outerwear with the jacket breast dart sewer 3519. Hardly any other workplace has acquired such a reputation in the outerwear sector and is as widespread as the automatic dart sewer from PFAFF. We have brought the 3519 up to the latest standard and in doing so, not only have we up-dated the technical standard of the workplace, but have also made it much more attractive and efficient. The PFAFF 3519-4/01 is the ONE and ONLY in the market for that difficult application.

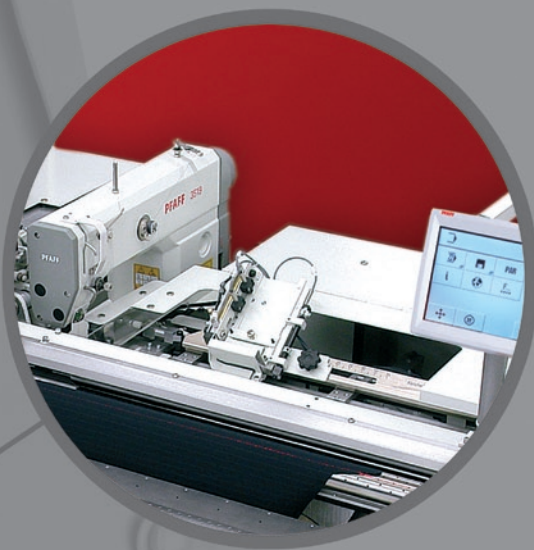

Output:

Up to 2,400 darts, or 1,200 jackets, in eight hours, depending on the number striped and checked materials.

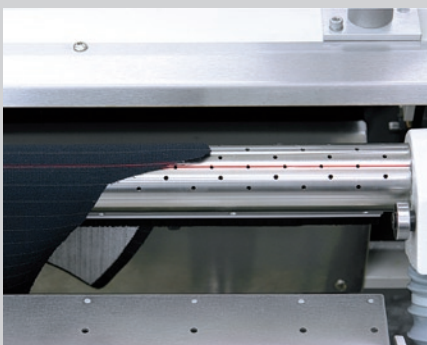

Application:

Single- and two-pointed as well as tapered darts of high durability

Features:

- The beginning of the seam can be secured with backtack or with condensed stitches
- The end of the seam (dart point) is secured with stitch condensation
- Single-pointed darts are always sewn from the pocket opening to the point. This ensures a slim, neat point with no untidy “dimples”
- The required dart length and waist-point height can be programmed for every size, and there is no need to change the guide rail
- By means of a special keyboard, the right dart for every size can be called up direct without any loss of time
- For accurate sewing of checks and stripes the front part cuttings are positioned exactly by means of a laser beam (on the front side)
- The darts are cut open by a horizontal slitting mechanism right up to the point
- The slitting system produces no cutting waste and allows optimum under-pressing of the seam
- Integrated programming of the seam pattern
- Quick call-up system for favourite seam programs. Memory for each 100 sewing programs in each with 3 different darts styles
- Needle-thread detector, piece counter, bobbin thread monitor
- Stacker, Loading table for overlapping work method

Equipment (Optional)

- No. 91-292 305-91 Suction motor (optional)
- No. 95-744 808-70 / 895 Device for aligning iron-on reinforcing strip in the dart point
- No. 95-744 852-90 Short parts stacker for children’s jackets and vests

New



Specifications:

Stitch type:

301 (lockstitch)

Electrical connection data:

AC 230 V

50/60 Hz

Input rating:

2.5 kW

Working air pressure:

6 bar

Air consumption:

approx.: 25l/cycle

Net weight:

approx.: 695 kg

Dimensions (in mm):

Length: 2,800

Breadth: 1,200 - 1,800

Height: 1,400

Hotline:

Technischer Service: +49-175/2243-101



**PFAFF Industriesysteme
und Maschinen AG**

Hans-Geiger-Str. 12 – IG Nord
D-67661 Kaiserslautern

Telefon: +49-6301/3205-0

Telefax: +49-6301/3205-3171

E-mail: info@pfaff-industrial.com

Printed in Germany
dtisch.
296-12-18950 07/12